Quotation

Our Ref: SCR.30114.REVIV.11/25

Project: 1 Riverside Cottages, The Dean, Alresford, SO24 9BE

Date: 4th November 2025

For the attention of: Nicholas Scarr

Dear Nicholas

Further to my recent visit to site I have pleasure in submitting our quotation for the waterproofing at the above project.

As discussed we would recommend the most suitable form of waterproofing system for this project being a cavity drain membrane system and have provided costs below for your consideration.

As mentioned the alternative is a cementitious waterproof slurry coat that is applied to the inside of the structure to form a physical waterproof barrier, however this does comes with a limited guarantee for reasons discussed below.

For complete belt and braces protection the two systems can be installed together and is something for you to consider however appreciate potential budget constraints.

Please note should the cemcoat system be adopted a structural engineer must verify the suitability of the structure to withstand the potential hydrostatic pressure exerted upon it.

Our quotation below must be read in conjunction with the following documents which are also attached.

SITE REQUIREMENTS sets out items to be quoted by the building contractor with regard to site safety, construction and site and surface preparation necessary for waterproofing.

ATTENDANCIES document sets out what MacLennan will supply and will not supply and what needs to be allowed for by others in there tender.

SERVICE AGREEMENT Drainage system must be commissioned on completion of installation and then serviced after completion of finishes to check for access to inspection ports and ensure channels are clear and clean. On completion of the first service a service agreement will be sent. Servicing will normally every 12 months but may be required more frequently. Channel servicing is critical for the first couple of years until deemed clear of lime and silt.

Our service agreement is attached. Costs will be as per the hourly rates in the agreement plus travel. A fixed cost can be agreed after the first visit to establish access, finishes etc.

Maclennan cannot apply for the insurance backed guarantee from the insurance company until all monies (inc retentions) have been paid in full. The guarantee is of far greater benefit to the client than the retention. This should be discussed with the client before ordering work.

The costs in the quotation below are based on the following information or drawings;

1227/01 & site visit held on 6/6/25

CAVITY DRAIN WATERPROOFING

Our costs allow for these works to be carried out over 1 Visits, the quotation is subject to work by others in the section at the bottom of the quotation.

Works to be carried out by MacLennan:-

1	Supply and fix System-08R ventilated cavity membrane from floor to ceiling, installed with fixings at 1m centres for Independent Wall Lining System. We have allowed to take the membrane 2.2m above external ground level INC double sealing of all joints for of membrane for basic gas protection	£	10,875.00	
2	Install Hydrodrain channel around the wall floor join.	£	1,138.00	
3	Supply and install Hydrodrain preformed corners	£	257.00	
4	Install Wall Mounted inspection ports. Critical to comply with BS8102 and manufacturers recommendations. Often omitted by others.	£	427.00	
5	To Supply and apply CemCoat to internal surfaces of preformed upstand (Up stand to be constructed by others)	£	305.00	
	We have allowed for the costs of a closed cell insulation. The addition of the insulation between the Hydrodrains will normally result in a nett saving as it removes the need for drainage channels to be formed in the main slab			
6	Supply and lay InsuFloor Grooved 50mm thick floor insulation onto structural floor slab, prior to floor membrane being laid.	£	2,355.00	
7	Supply and install System-08R ventilated cavity membrane over floor areas. INC double sealing of all joints for basic gas protection	£	1,830.00	
8	Supply Hydrosump-Pro and install 1 no; duty P63 - FEKA VS 750 MNA 220-240/50 and 1 no; P63 - FEKA VS 750 MNA 220-240/50 backup pump with CP9 Pump controller incorporating high level water alarm. Sump to be installed by others. Pumps will be assembled and piped to the top of the sump to be connected on to by others.	£	4,385.00	(1 No. sump)
9	Supply Hydrosump-Pro and install 1 no; duty NP400 ECO and 1 no; NP400 ECO backup pump with CP9 Pump controller incorporating high level water alarm. Sump to be installed by others. Pumps will be assembled and piped to the top of the sump to be connected on to by others. Allowing for 2 x 400 watt pumps with a 3 year guarantee . Others often allow for 1 pump or 2 small pumps which are far less robust with a 1 year guarantee. This pump set to be installed externally for surface water	£	3,624.00	(1 No. sump)
	Commissioning of the system on completion of installation of cavity drain system (this is to be carried out at the same time as Items 1 - 9)		Costs under servicing below	
	Cavity Drain Waterproofing Total	**£**	**25,196.00**	

CAVITY DRAIN COMMISSIONING & SERVICING

Our costs allow for these works to be carried out over 2 Visits, the quotation is subject to work by others in the section Cavity Drain system site requirements.







Servicing of a Cavity Drain System must include channel camera survey. Servicing is a requirement of BS8102/22 and is of a huge benefit to the client. Unlike every other form of waterproofing cavity drain is serviced and maintained so as leaks can be prevented before they can occur. This is the reason it is the only system with meaningful guarantees. The service agreement is attached. There are indicative costs which will be confirmed after the first service at which we can confirm accessibility and condition of channel.

	Works to be carried out by MacLennan:-		
	Servicing of the system on Practical Completion of the cavity drain system, and then again after installation of finishes as per the recommendations of BS8102:2022. Costs for ongoing servicing will be provided at the end of the project.		
10	Commissioning of the system on completion of installation of cavity drain system (this is to be carried out at the same time as Items 1 - 9)	£	492.00
11	First Service of the system on completion of finishes (Plastering and Screed)	£	492.00
	Cavity Drain Commissioning & Servicing Total	**£**	**984.00**

CEMENTITIOUS COATINGS

Our costs allow for these works to be carried out over 1 Visits, the quotation is subject to work by others in the section at the bottom of the quotation.

CEMENTITIOUS RENDERS (Limited Guarantee and excludes failure due to the following)

- Damage to the waterproofing due to structural movement
- Damage due to any movement caused by external factors i.e. Trafficking, Structural, Thermal or Movement Cracks etc.
- Damage to the waterproofing due to damage or puncturing
- Damage due to environmental conditions
- Any Condensation Issues are not covered by the guarantee
- Damage caused by the debonding of the original surface under our coating

All guarantees offered from other companies and the manufacturers will come with caveats as do ours. Most guarantees are from the manufacturers and only cover materials and not the installation of the works.

	Works to be carried out by MacLennan:-		
12	To: Loadout materials and clear away on completion		
13	To: Supply and apply Repair Mortar Fillet to wall floor junction.		
14	To: Supply and apply CemCoat Prebagged system to pre-prepared walls.		
15	To: Supply and apply Cemcoat Prebagged system to pre-prepared floors.		
	All preparation works including full removal of plaster back to the brickwork and any repair/fairing coats required carried out by others		
	Cementitious Coatings Total	**£**	**16,367.00**

SUMMARY

Cavity Drain Waterproofing Total	£	25,196.00
Cavity Drain Commissioning & Servicing Total	£	984.00
Cementitious Coatings Total	£	16,367.00
Net Total	£	42,547.00

All prices are subject to VAT rate at the time of invoicing

Deposits will be required 14 days prior to works being scheduled

Prices remain fixed for a period of 60 days, after this period we should be consulted

Prices could be Subject, additional costs dependent on Project specific Prelim's and Contract Terms

This quotation is to be read in conjunction with the Technical Guidance Document(s) (TGD), marked site plans , details and work others detailed on the following pages. All work is subject to MacLennan terms and conditions unless agreed otherwise in writing.

INSURANCE and GUARANTEES

MacLennan 10 Million Professional Indemnity	Included in price
MacLennan insurance backed warranty	Included in price
MacLennan insurance all risks	Included in price
Manufacturers 10-30 year materials guarantee *Cavity Drain materials typically 30 years with the expectation of mechanical items*	Included in price

Accelerant Insurance UK Limited (formerly GPI) Insurance is not included in the quotation. The Accelerant Insurance UK Limited (GPI) insurance is a guarantee that in the event MacLennan should cease trading for any reason the work carried out by MacLennan would still be covered under insurance from the Accelerant Insurance UK Limited (GPI). A one off premium payment is required for 10 years cover.

Our quotation is subject to MacLennan Terms and conditions having been read and accepted. Terms and conditions are attached.

GPI Insurance guarantee - Type C Accelerant Insurance UK Limited (GPI) 10 Year Cavity Drain	£1,662.39


This Premium is subject to confirmation from GPI Insurance

Any Guarantees required for over a waterproofing value £50,000.00 will require an assessment from our insurance company before works can commence, this will incur a fee of 0.1% (contract value accepted) plus VAT.

Suitable RC/Brick upstand formed by others to door thresholds

Cemcoat tanking slurry to walls & slab prior to membrane installation

Feka grey water pumps to deal with ground water & possible grey water flooding through structure

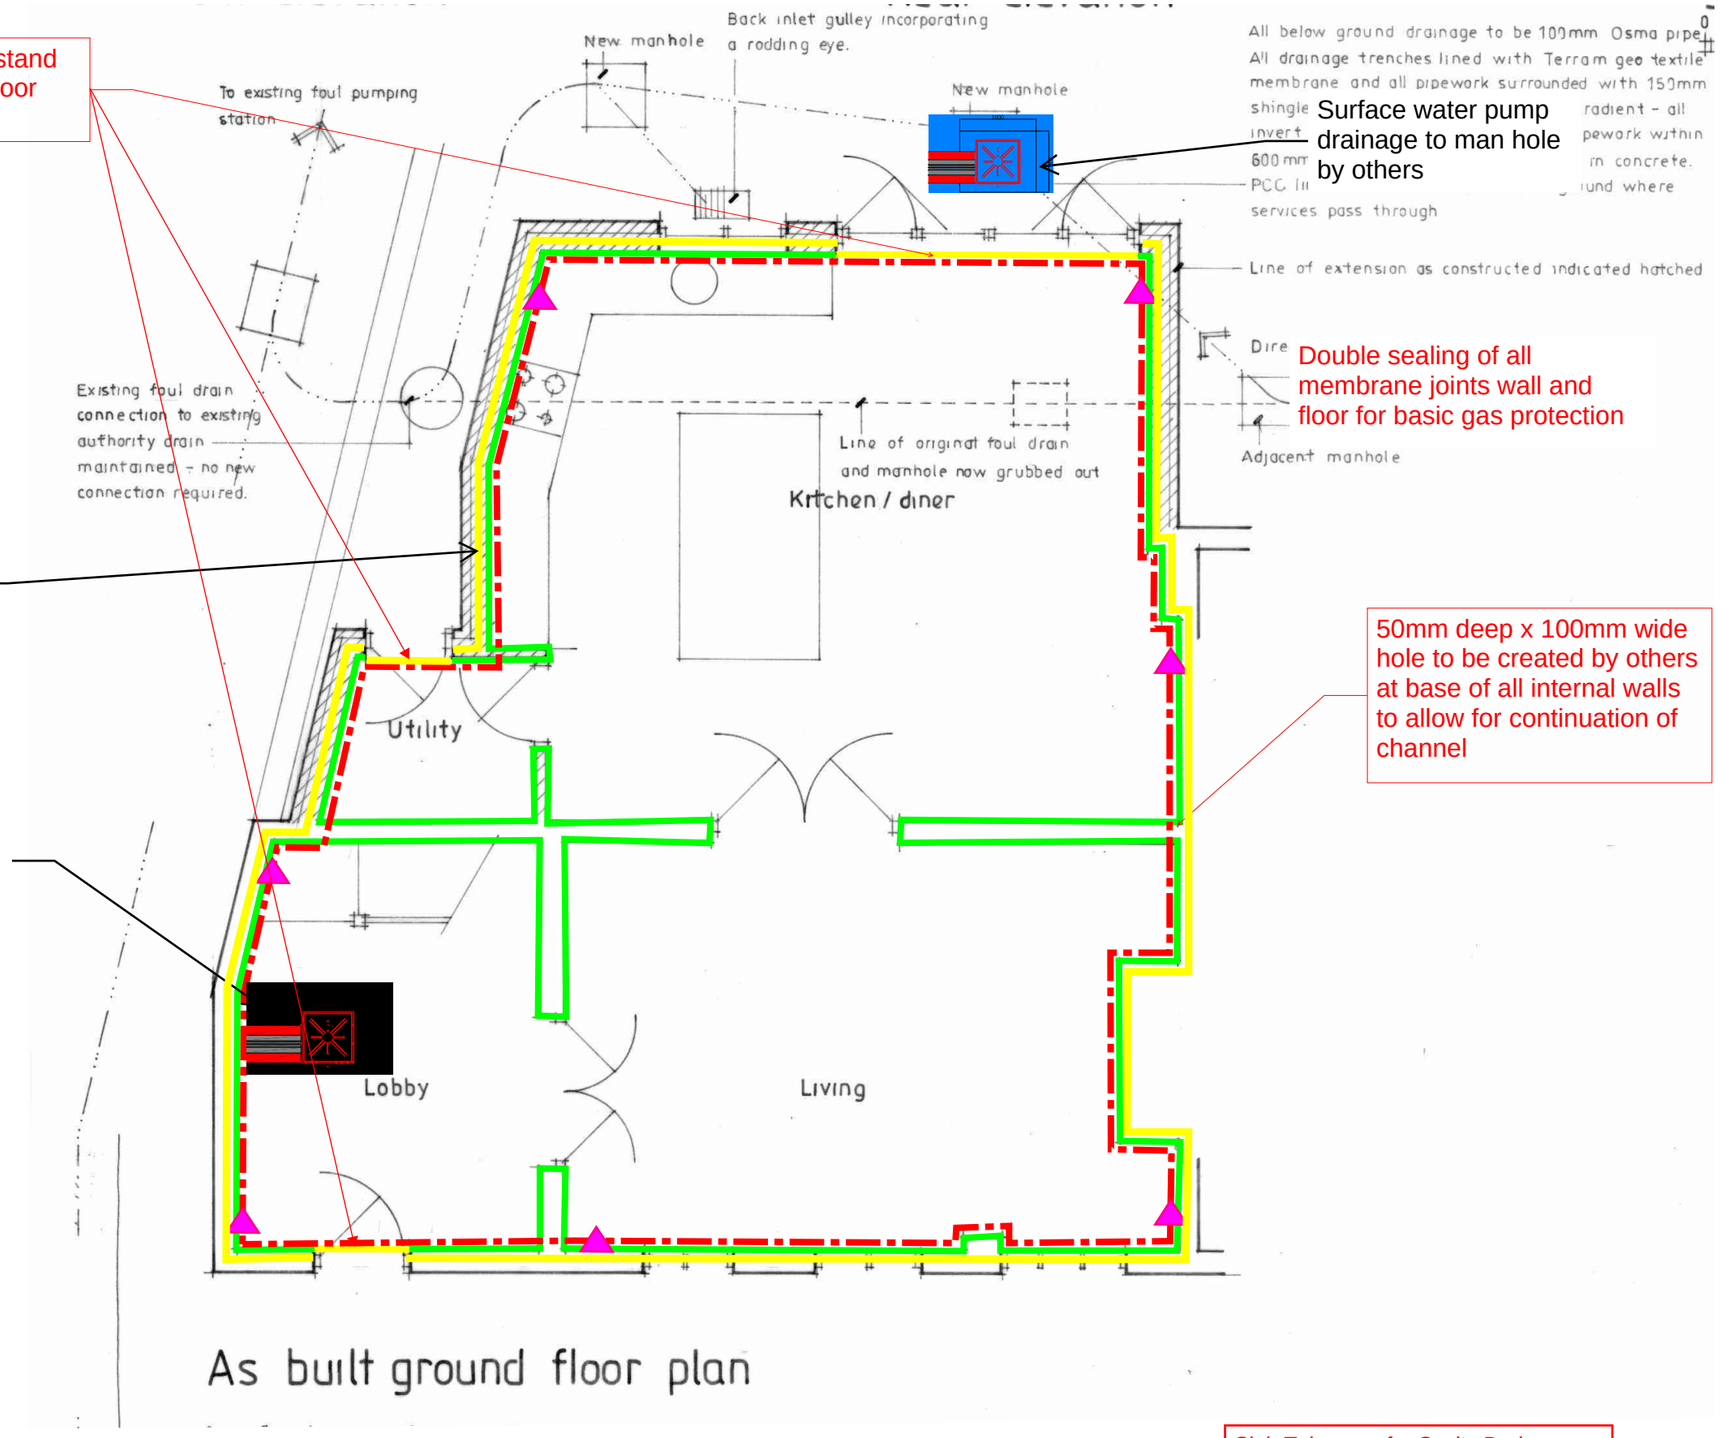

Double sealing of all membrane joints wall and floor for basic gas protection

50mm deep x 100mm wide hole to be created by others at base of all internal walls to allow for continuation of channel

If gravity discharge is to be utilised, it must only be connected to a surfaces water system (Not Foul).
If there is any concern that the surface water system could back up, then an alternative such as sumps and pumps should be adopted

Slab Tolerance for Cavity Drain System max. +/- 10mm

Conditions must reach a minimum of 5c° and rising while being 3c° above dew point for any deck waterproofing to be carried out

Key

External System
- Post Applied to walls
- Pre-Applied under slab

Cementitious Coatings
- Cemcoat to Vertical Surfaces
- Cemcoat coatings to Horizontal Surfaces

Deck System
- Polyprufe to Vertical Surfaces
- Polyprufe to Horizontal Surfaces

Internal System
- System-08 to walls
- Hydrodrain
- System-08 to Floors
- Proposed sump position
- Wall Inspection Ports
- Floor Inspection Ports
- Pipe to Drainage by others

Rev	Description	Issued

Project	1 Riverside Cottage SO24
Job Ref	SCR.30114.REVIV.11/25
Title	Cavity Drain Waterproofing Plan
Scale	NTS
Project No.	30114
Drawing No.	001
Date:	05/11/25
Revision No:	REV C04
Page	1 of 1

MACLENNAN
0330 3200 240
enquiries@maclennanuk.com

All material on these pages, including without limitation text, logos, icons, details, & design are Copy right MacLennan (LSE Building Preservation Ltd). And may not be copied, reproduced distributed or displayed without MacLennan's express written permission.
© Copyright 2016, MacLennan. All rights reserved. Company address: Unit 5 Helix Trade Park, Sunrise Way, Amesbury, SP4 7EY